

ROYALÉ TOUCHÉ wooden floors

···· PAVIMENTO ······



ROYALÉ TOUCHÉ WOODEN FLOORS

······ PAVIMENTO ······

www.pavimentofloors.com Mobile: +91 93138 07316 Toll free- 1800 104 4357

LLT - Liquid Layer Technology Patented tech of logy used for energy saving product hly stable & balanced planks



ØŴ SYNCHRONISED TEXTURES

advanced synchronized textu to life natural wood finishes.



VARIABLE PLANK Different plank sizes to create a majestic yet homely effect in every room type.



000 🗌

PRODUCTION One of the largest manufacturing lines in the world for laminate flooring under one roof.

V GROOVE V Groove effect is specially colored to give the entire floor the same feel & look.



 \approx

ABRASION-RESISTANT The highest abrasion class available worldwide of AC4 and AC5 for all the floors.

Maid - Free Enjoy our beautiful low maintenance floors.



Pigments with UV resistance of 6+ on the blue wool scale, assuring colour fastness for years.

When Titans come

History is created when two titans of industry cross each other's paths, and decide to walk the glory road, together.

A collaborative and creative force of such epic proportions changes the face of the industry, Beckoning a new era. Today we are at the cusp of such a phenomenon... Royale Touche, a pioneer of luxury laminates in India, an icon with over four decades of prolific experience and expertise, joins hands with Classen, Germany one of the world's leading manufacturers of laminate flooring, to create Royale Touche Floors, the most exclusive range of wooden laminate floorings.

Why Royale Touche Floors?

- Synchronised Textures: Gives an excellent aesthetic and natural look to the floors, making it impossible to differentiate between laminate & natural wooden floors.


- Water Lock Technology: Prevents seepage of water from joints into the HDF substrate for 24 hours thus preventing any damage and swelling of the product.

- AC5 Abrasion Rating: Provides the floor with the highest in its class abrasion protection against all normal wear & tear and keeps your floors looking new for years to come.


- Liquid Layer Technology: Provides excellent balance and protection to the underside of the product to prevent warpage and allow for even expansion and contraction of the floors.







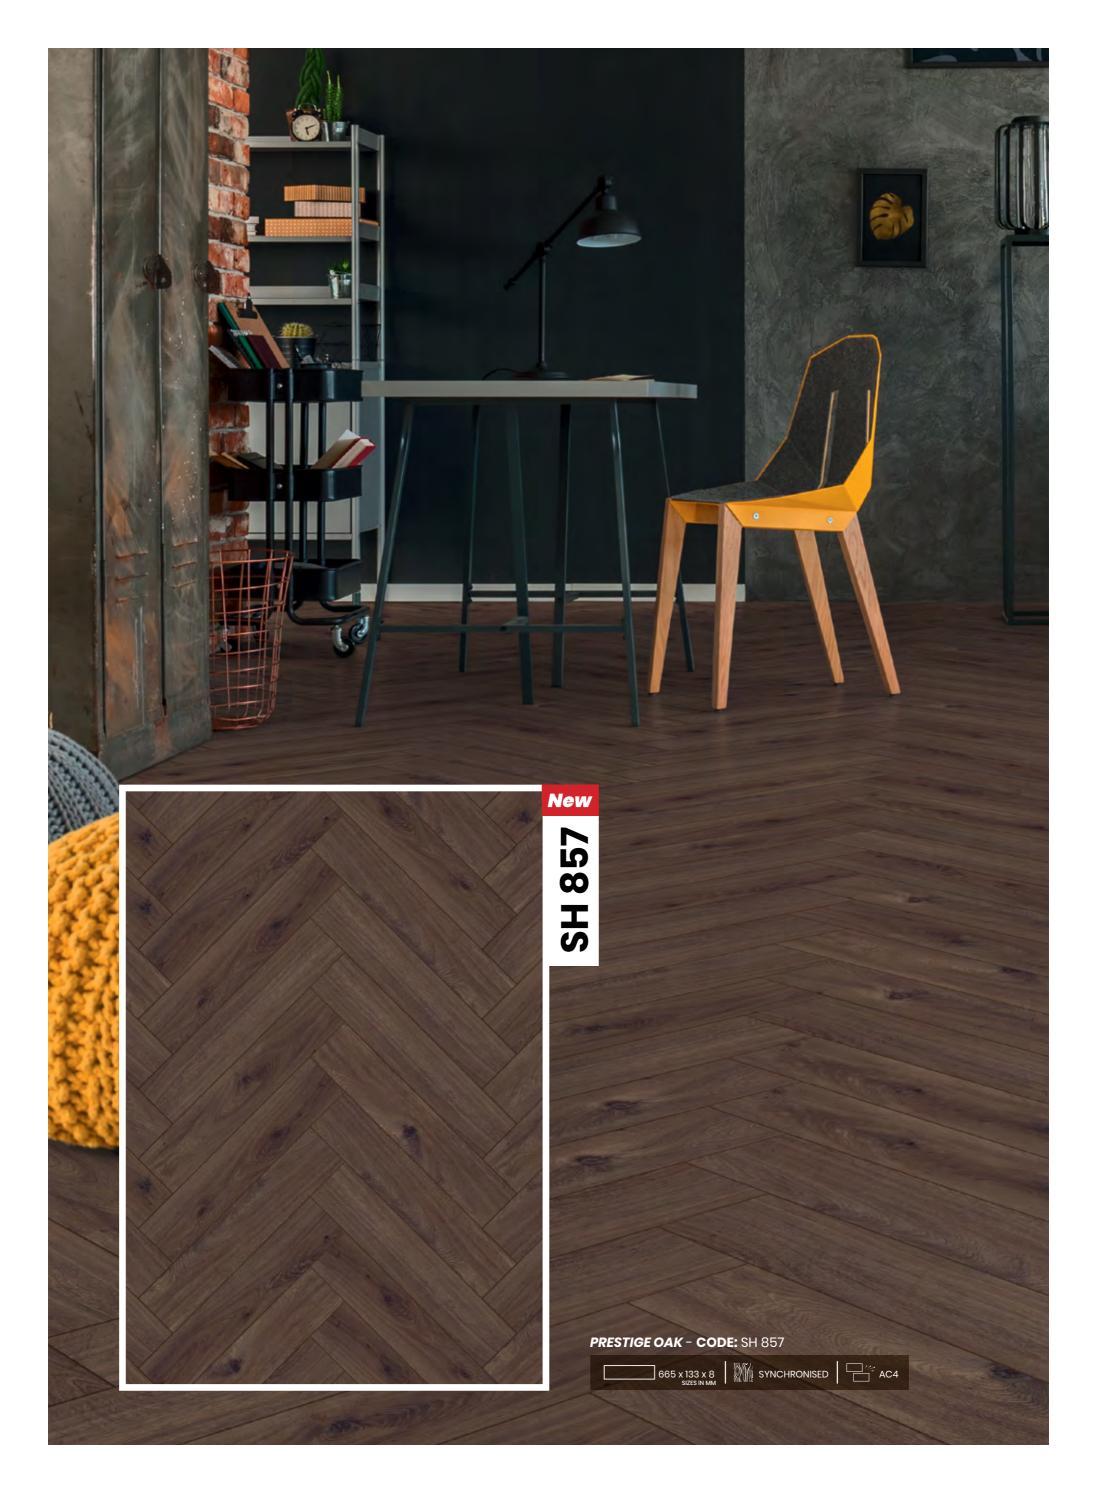



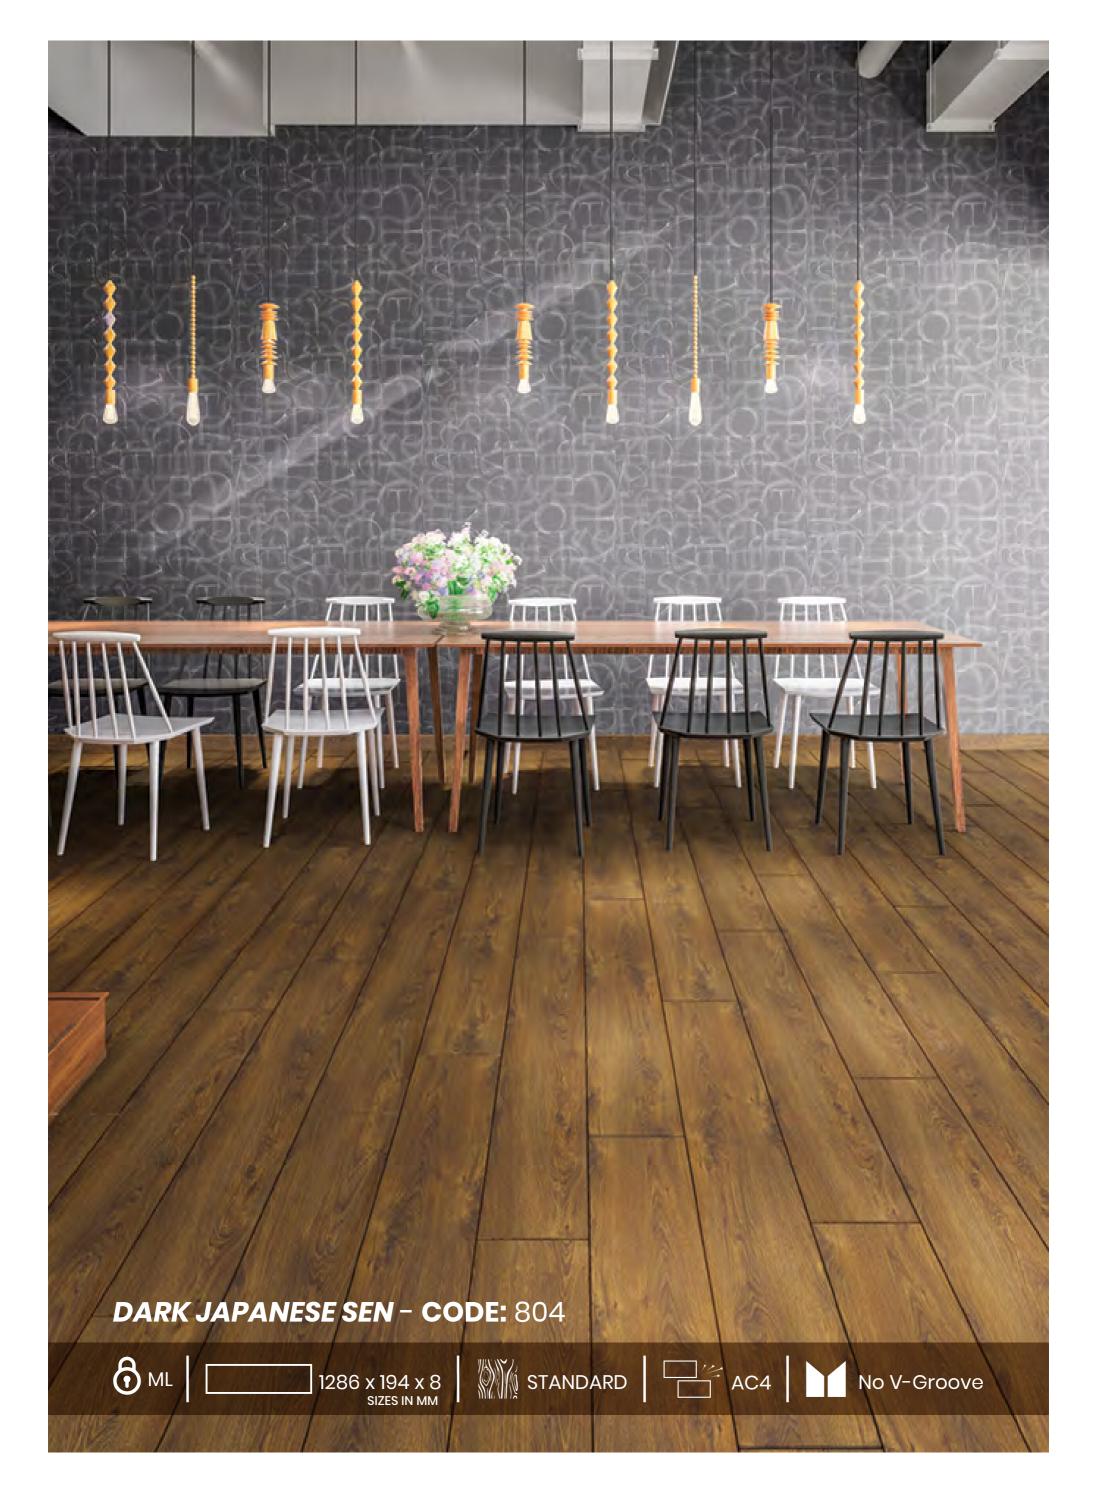


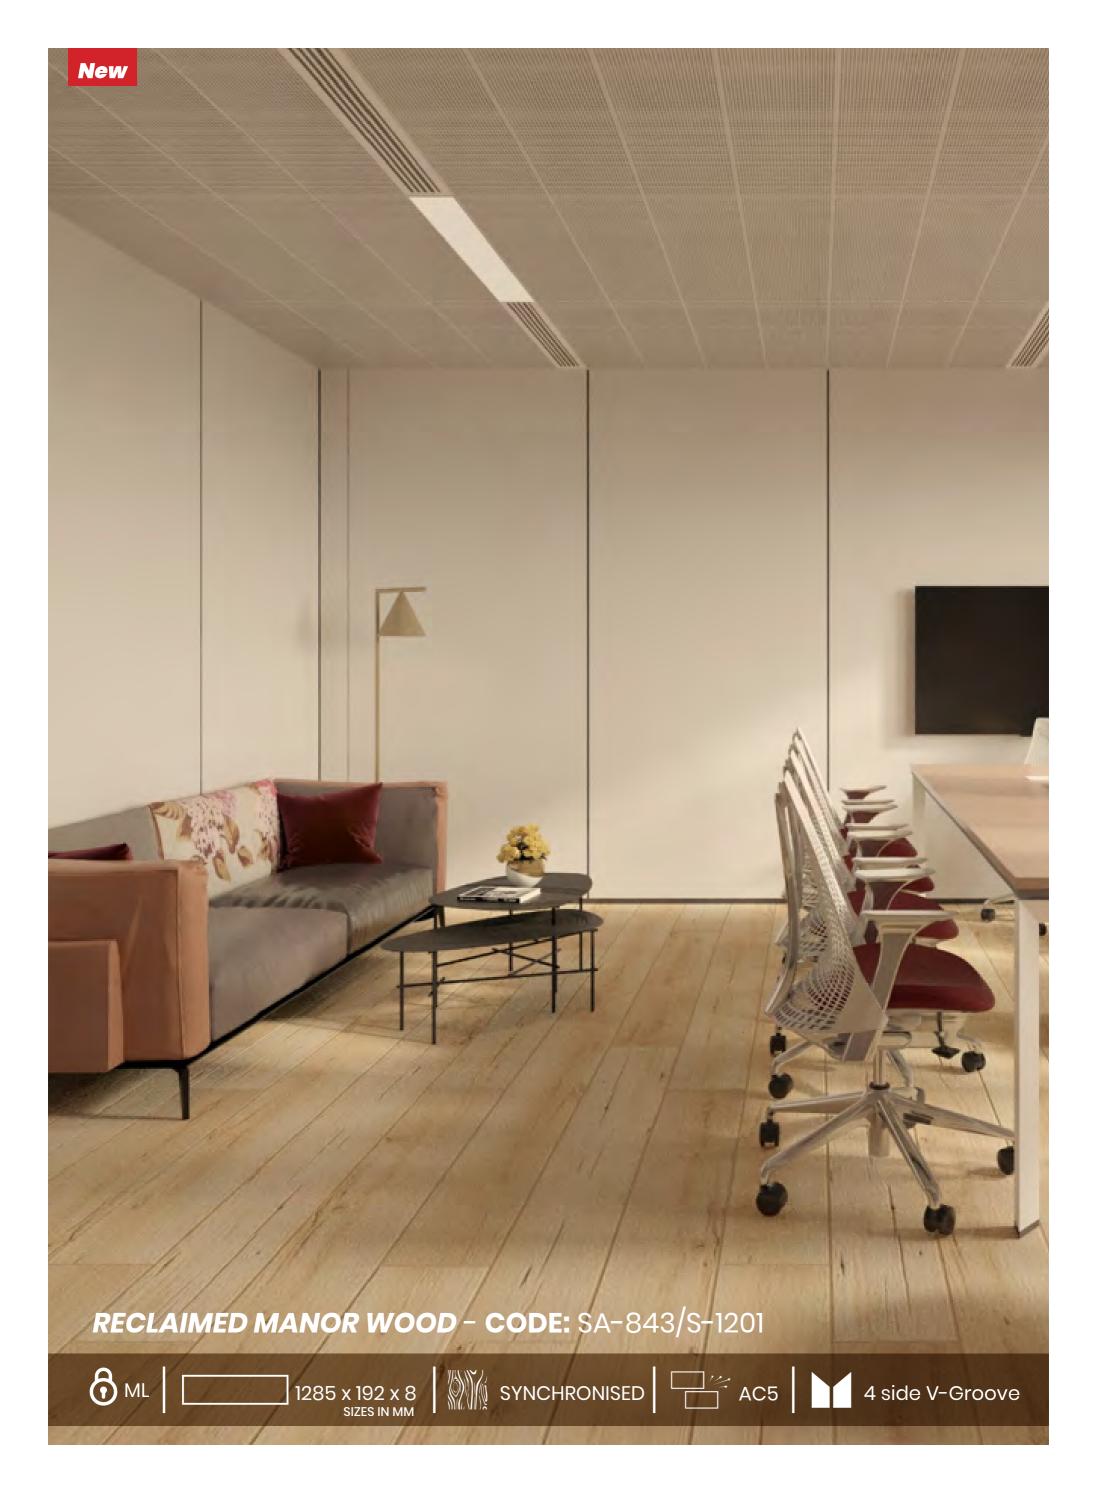


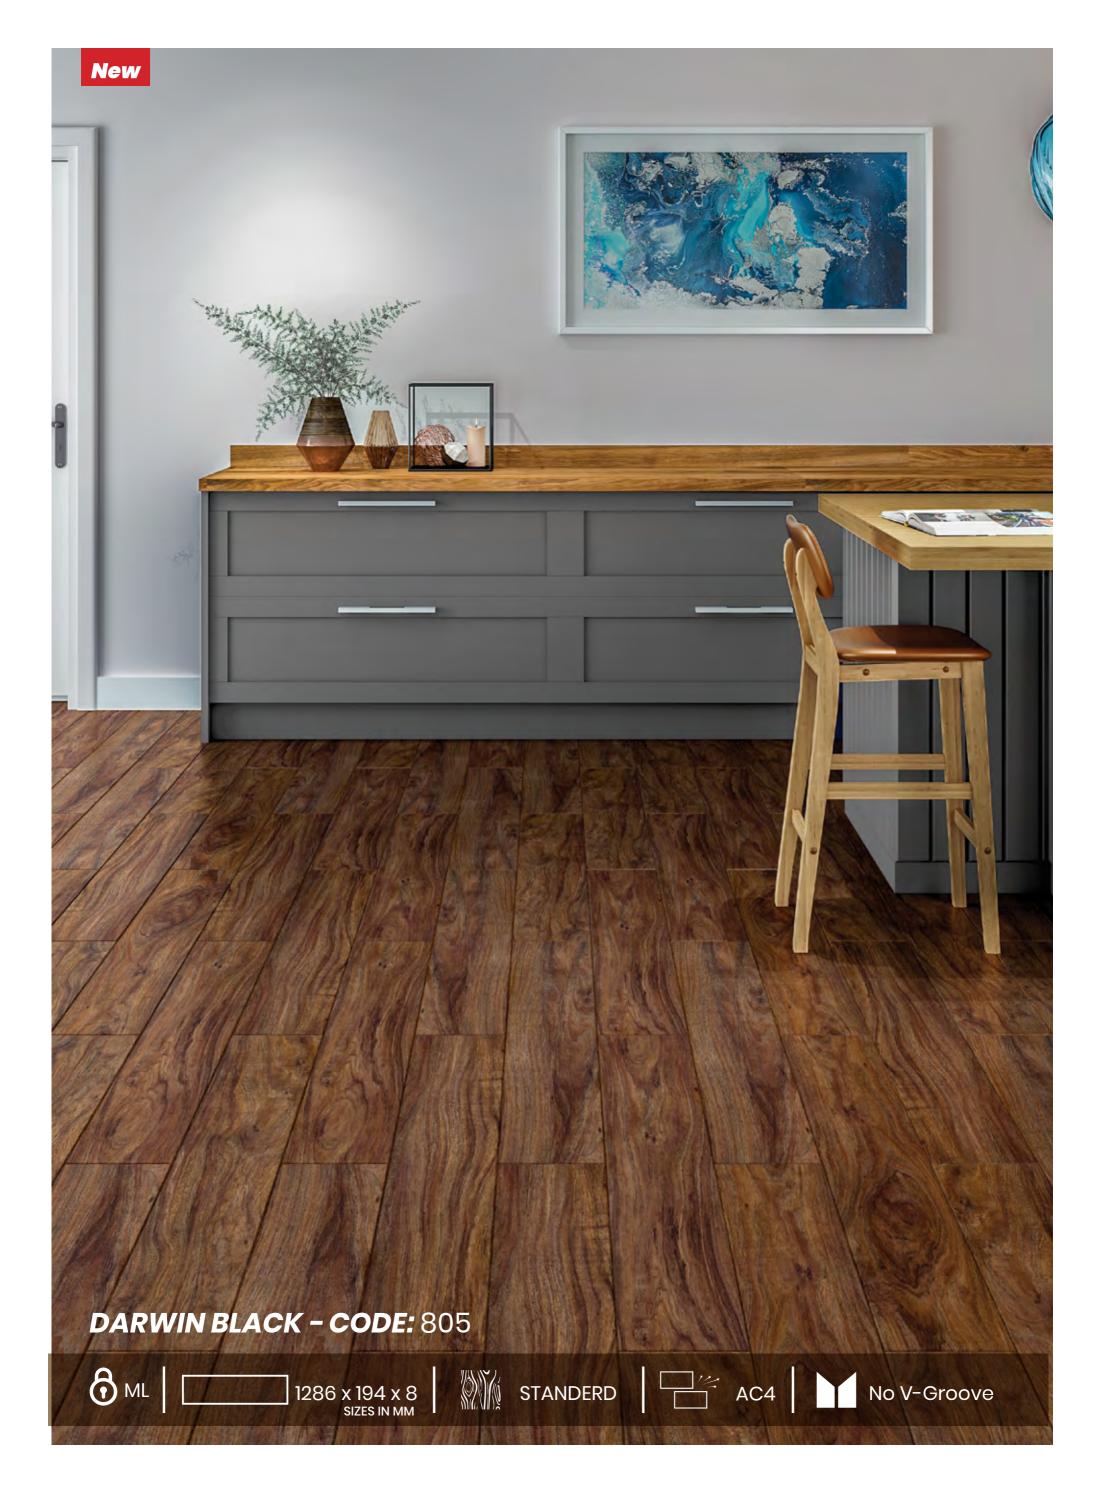







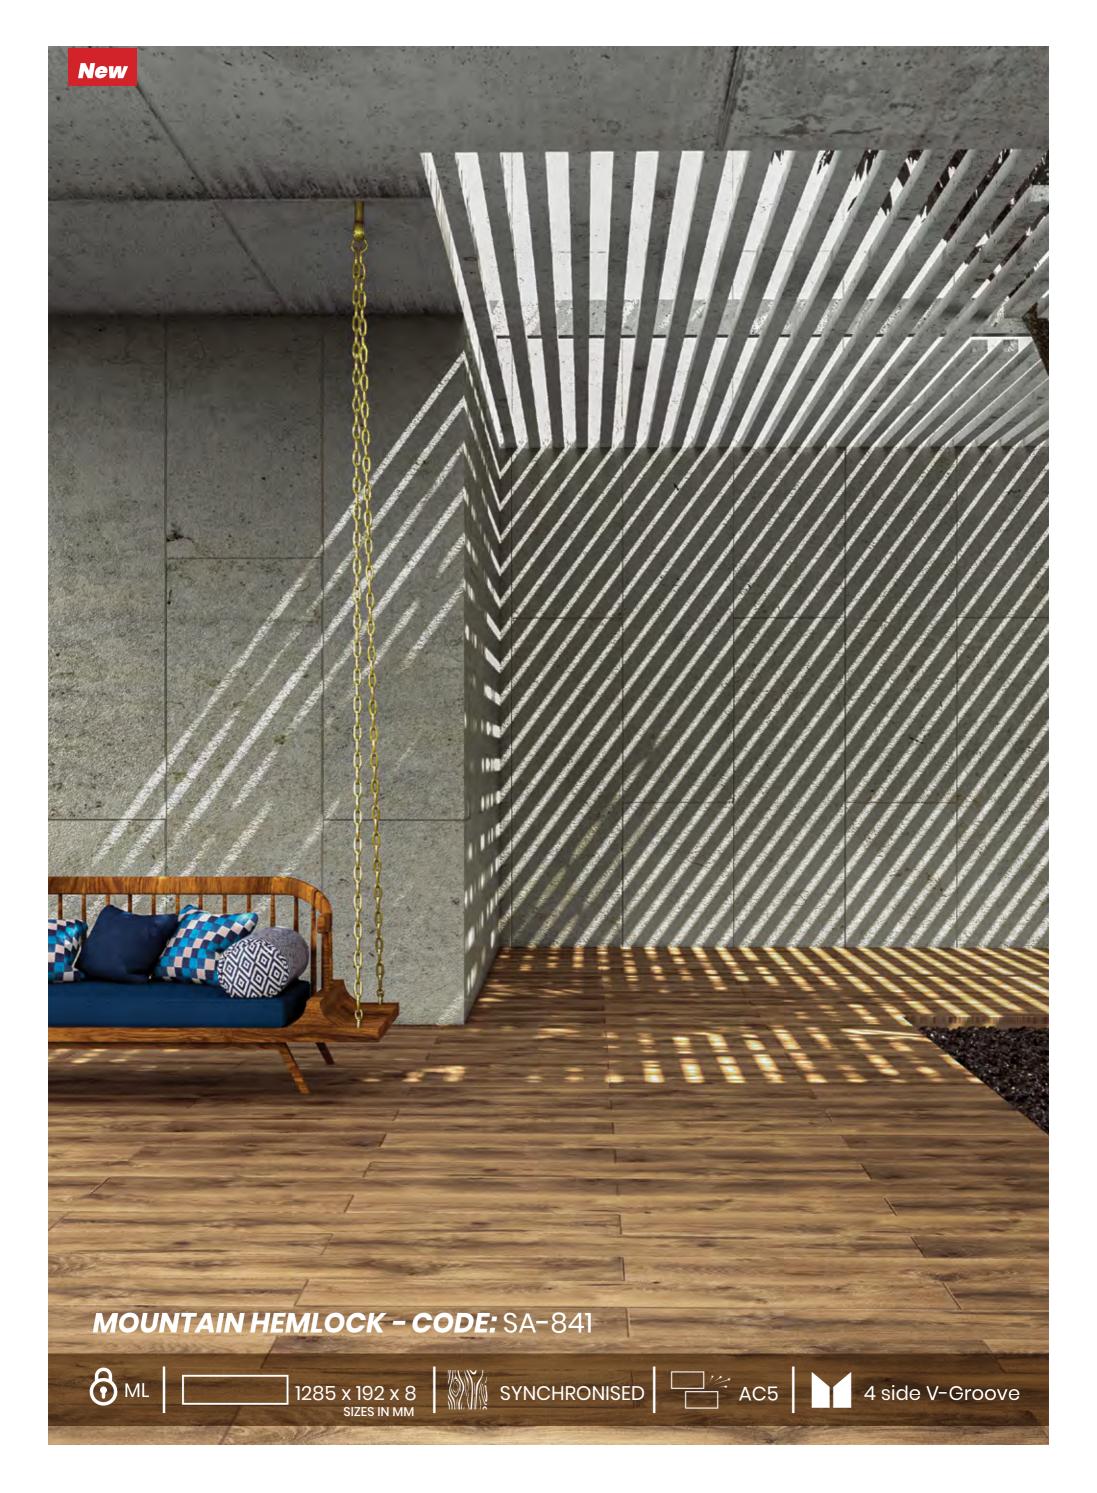


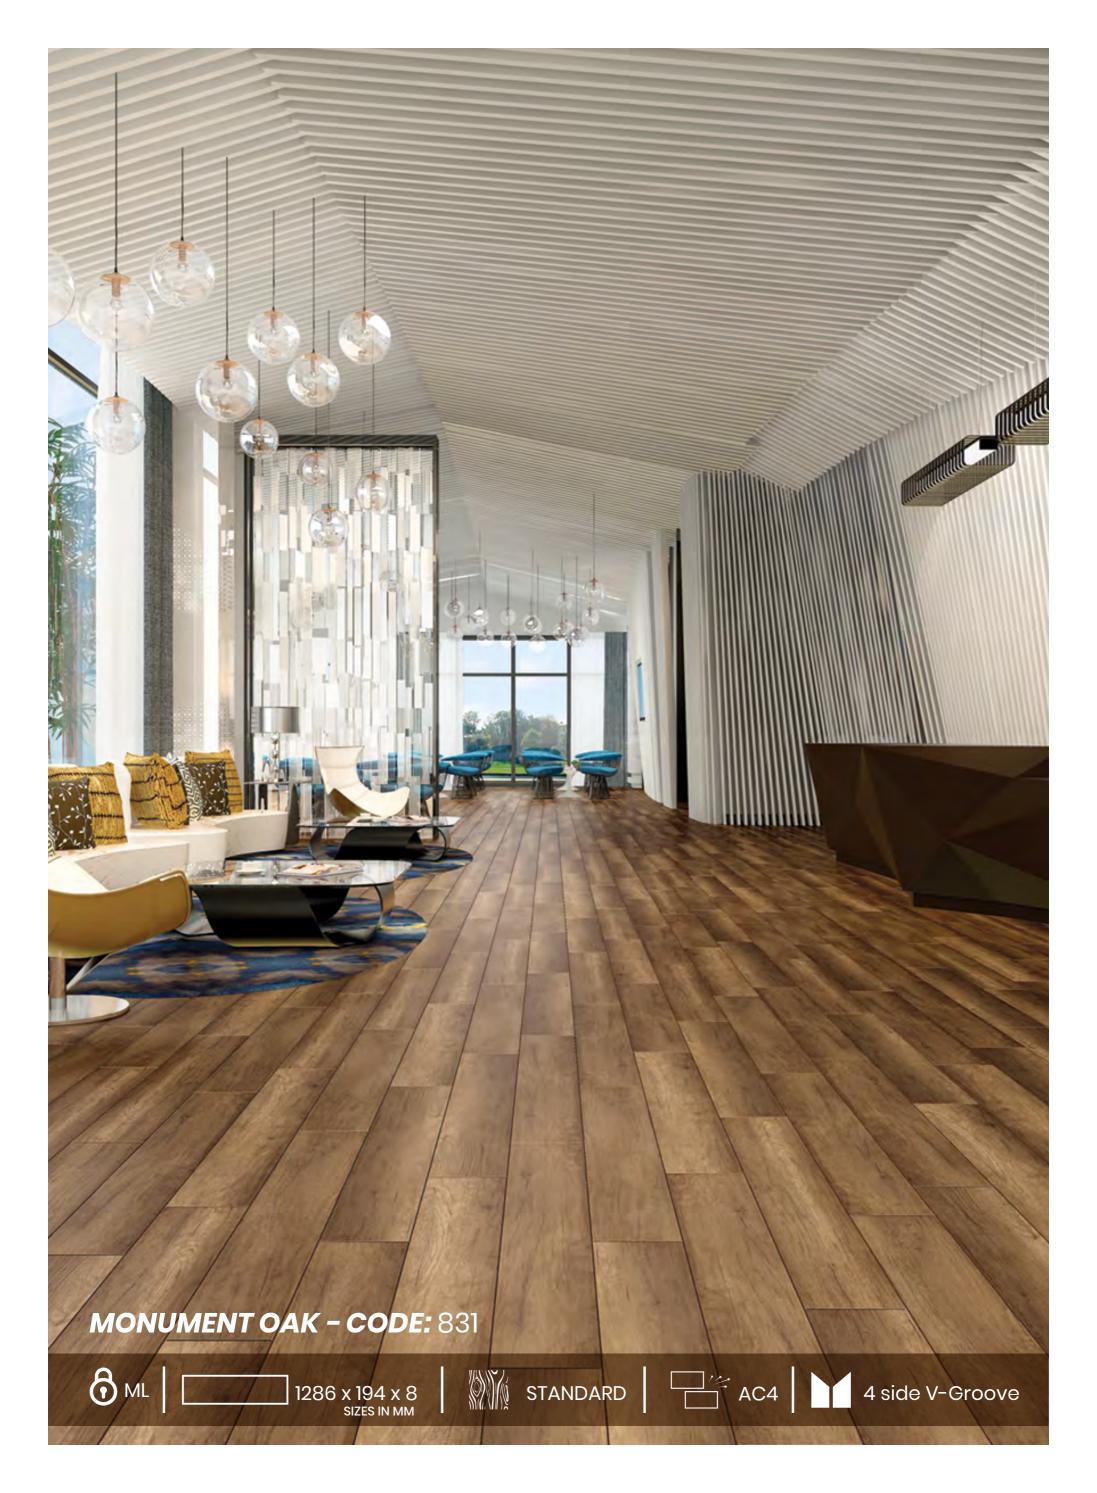

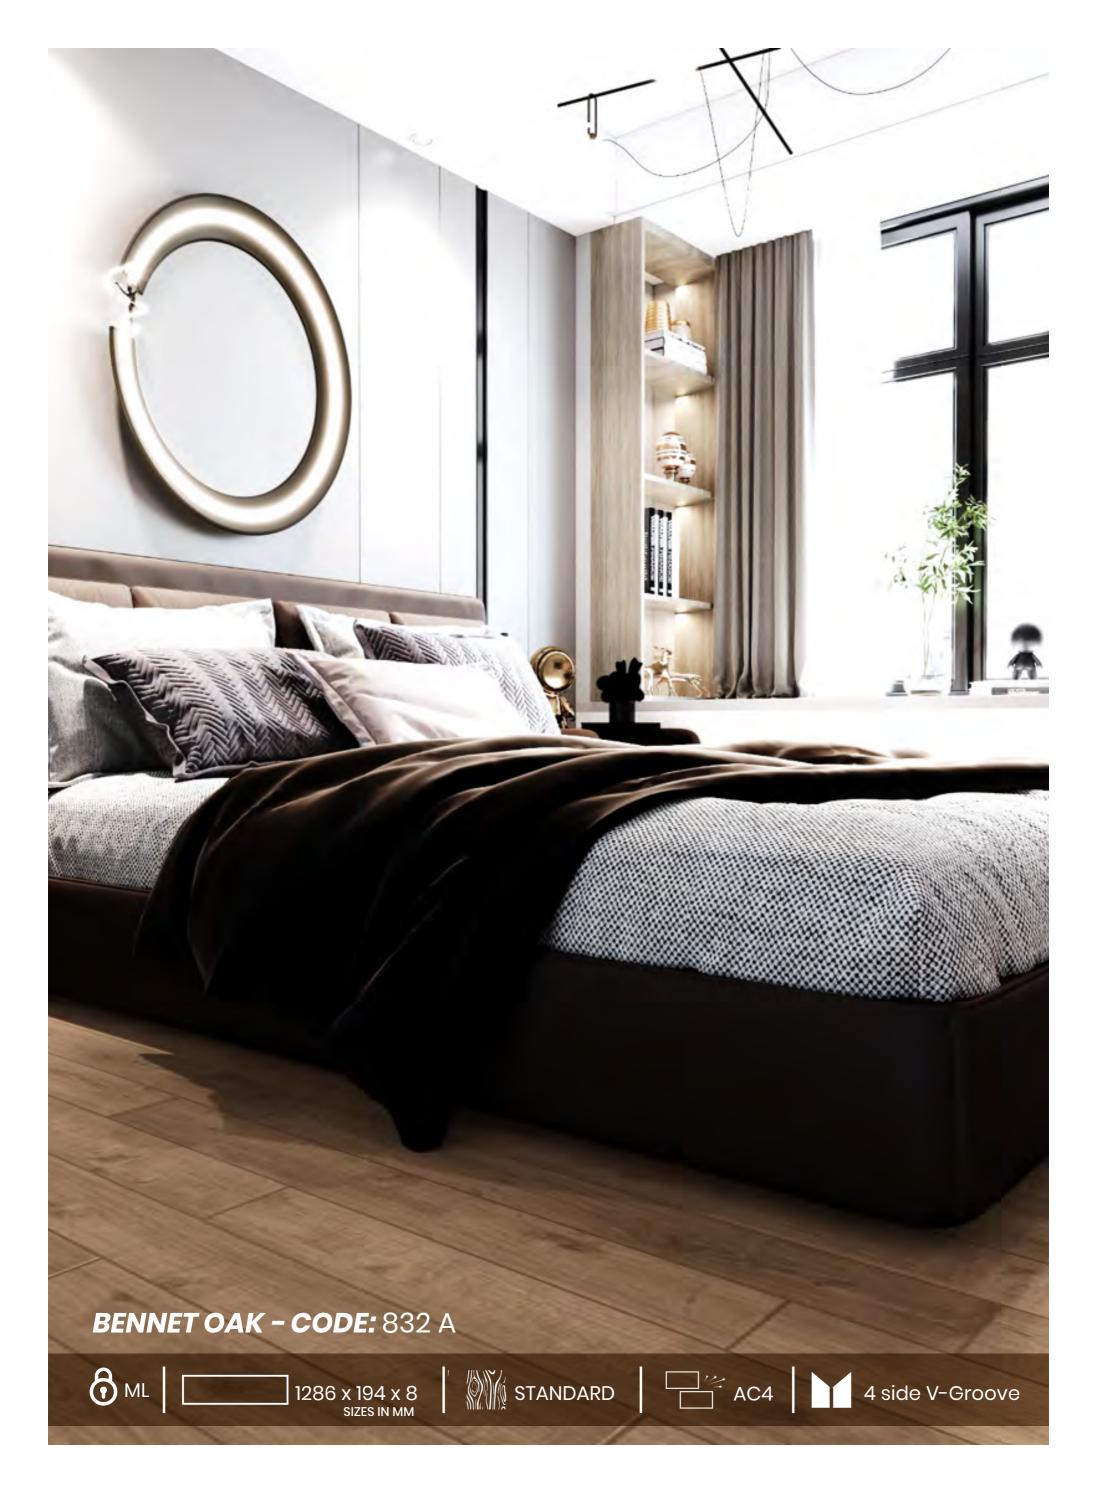




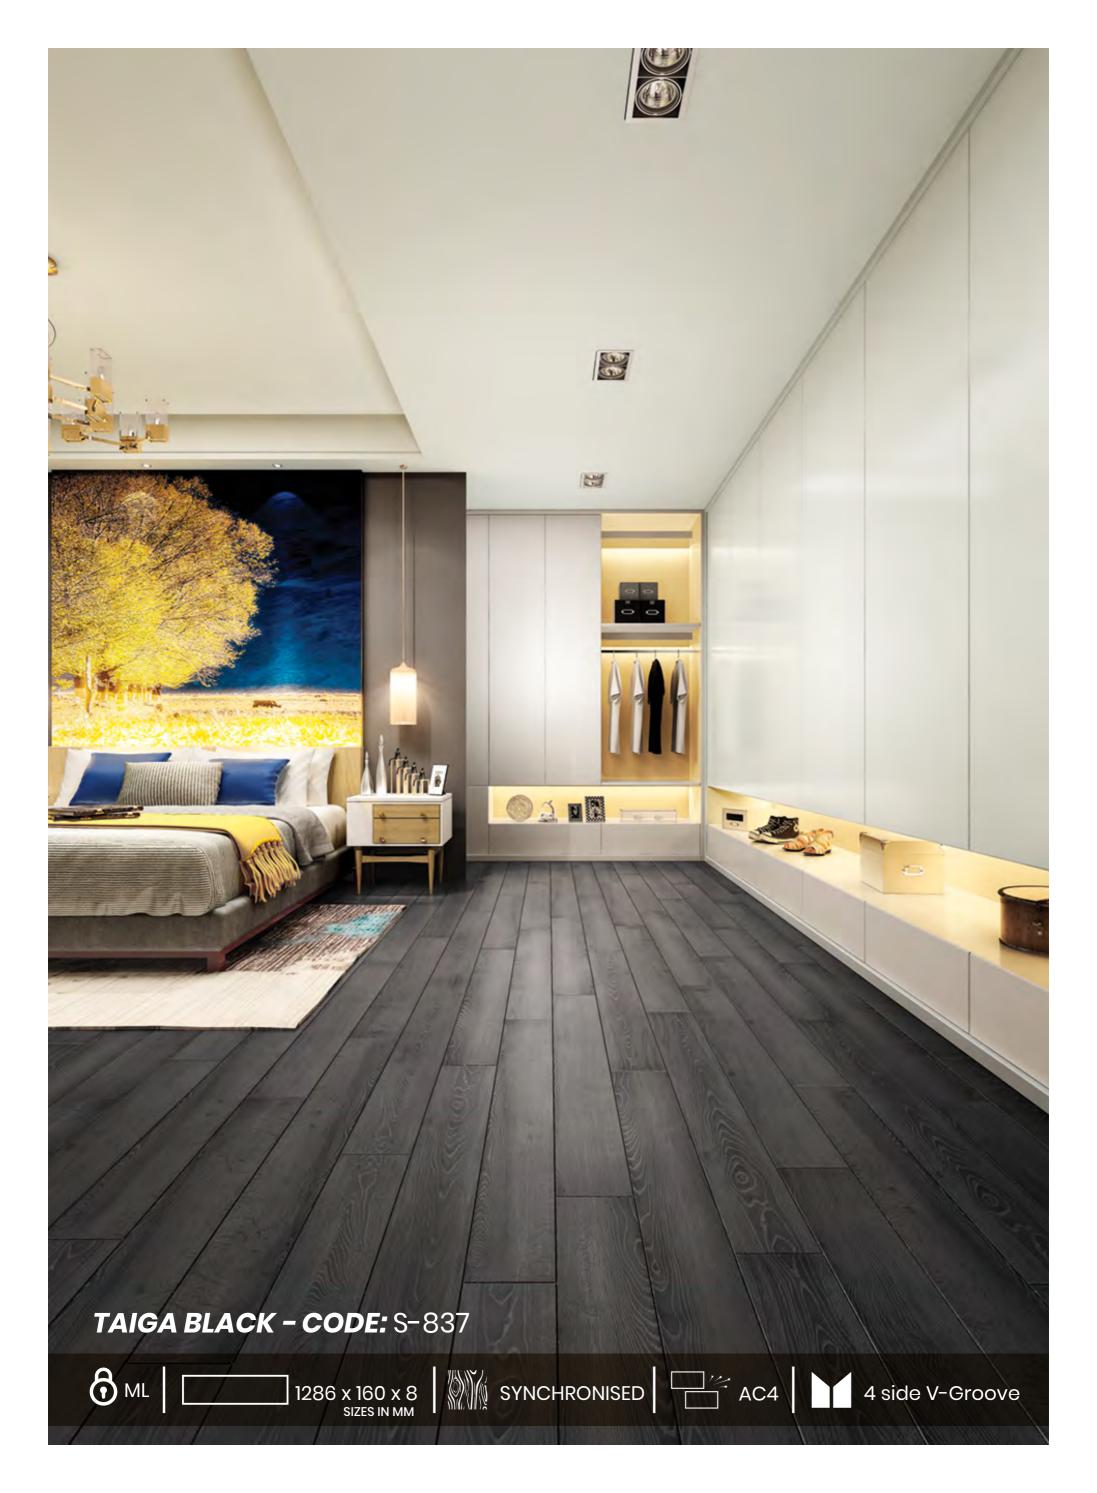

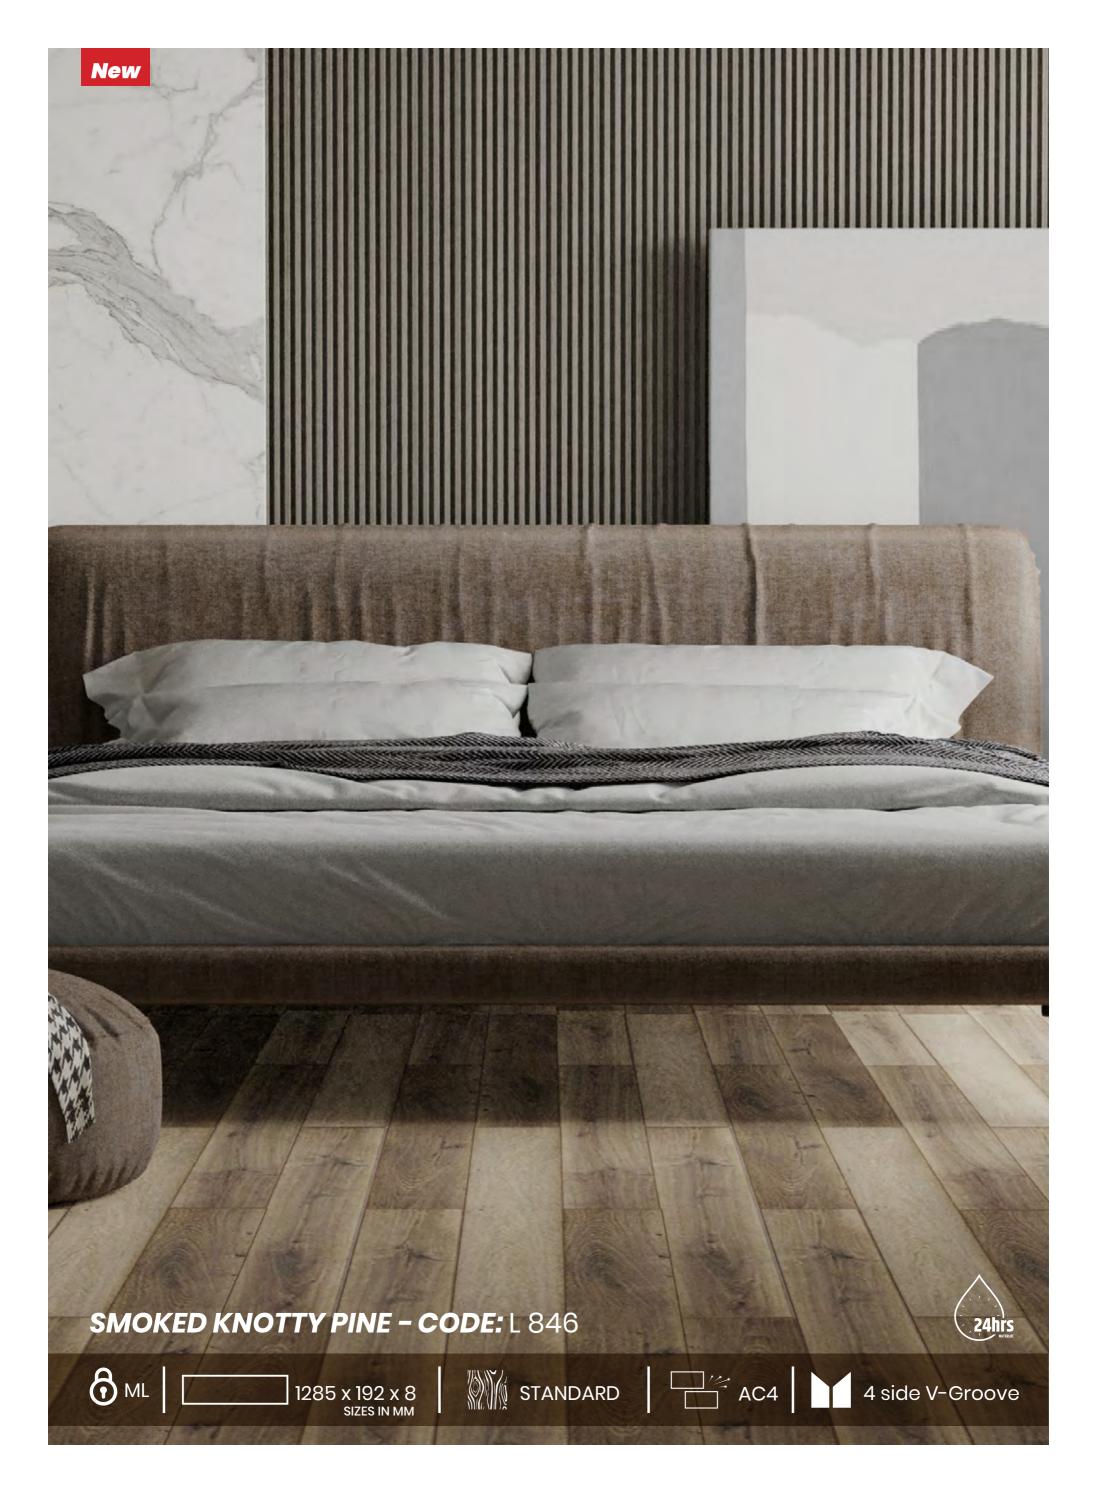




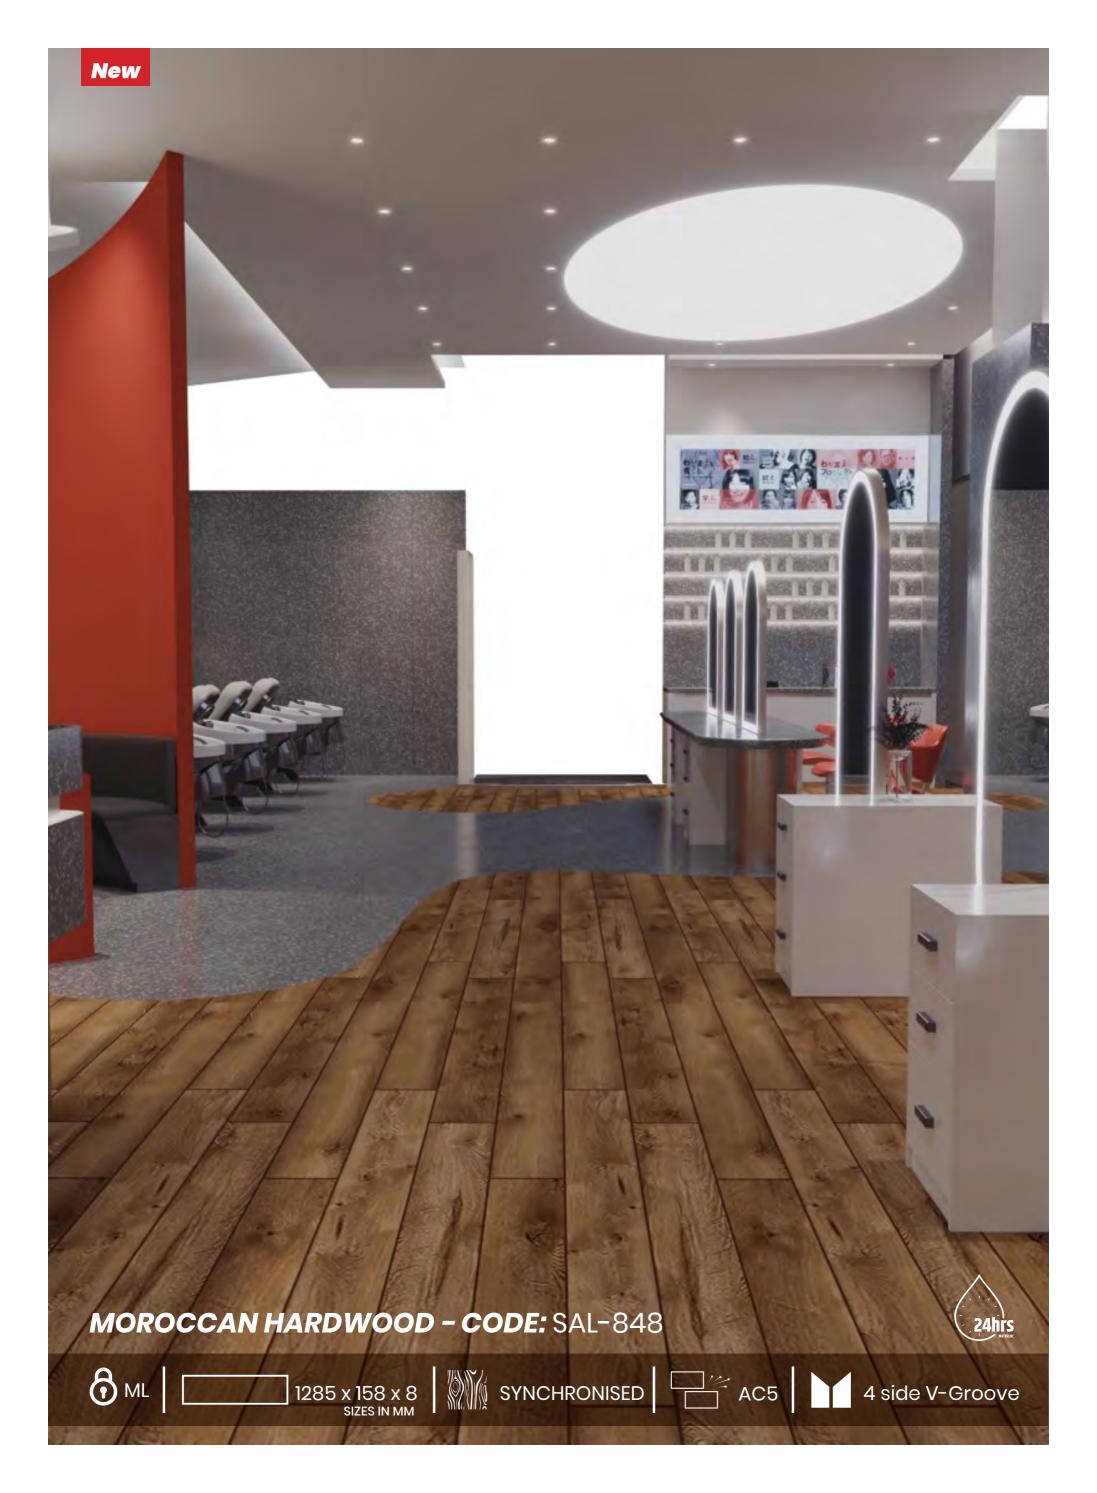







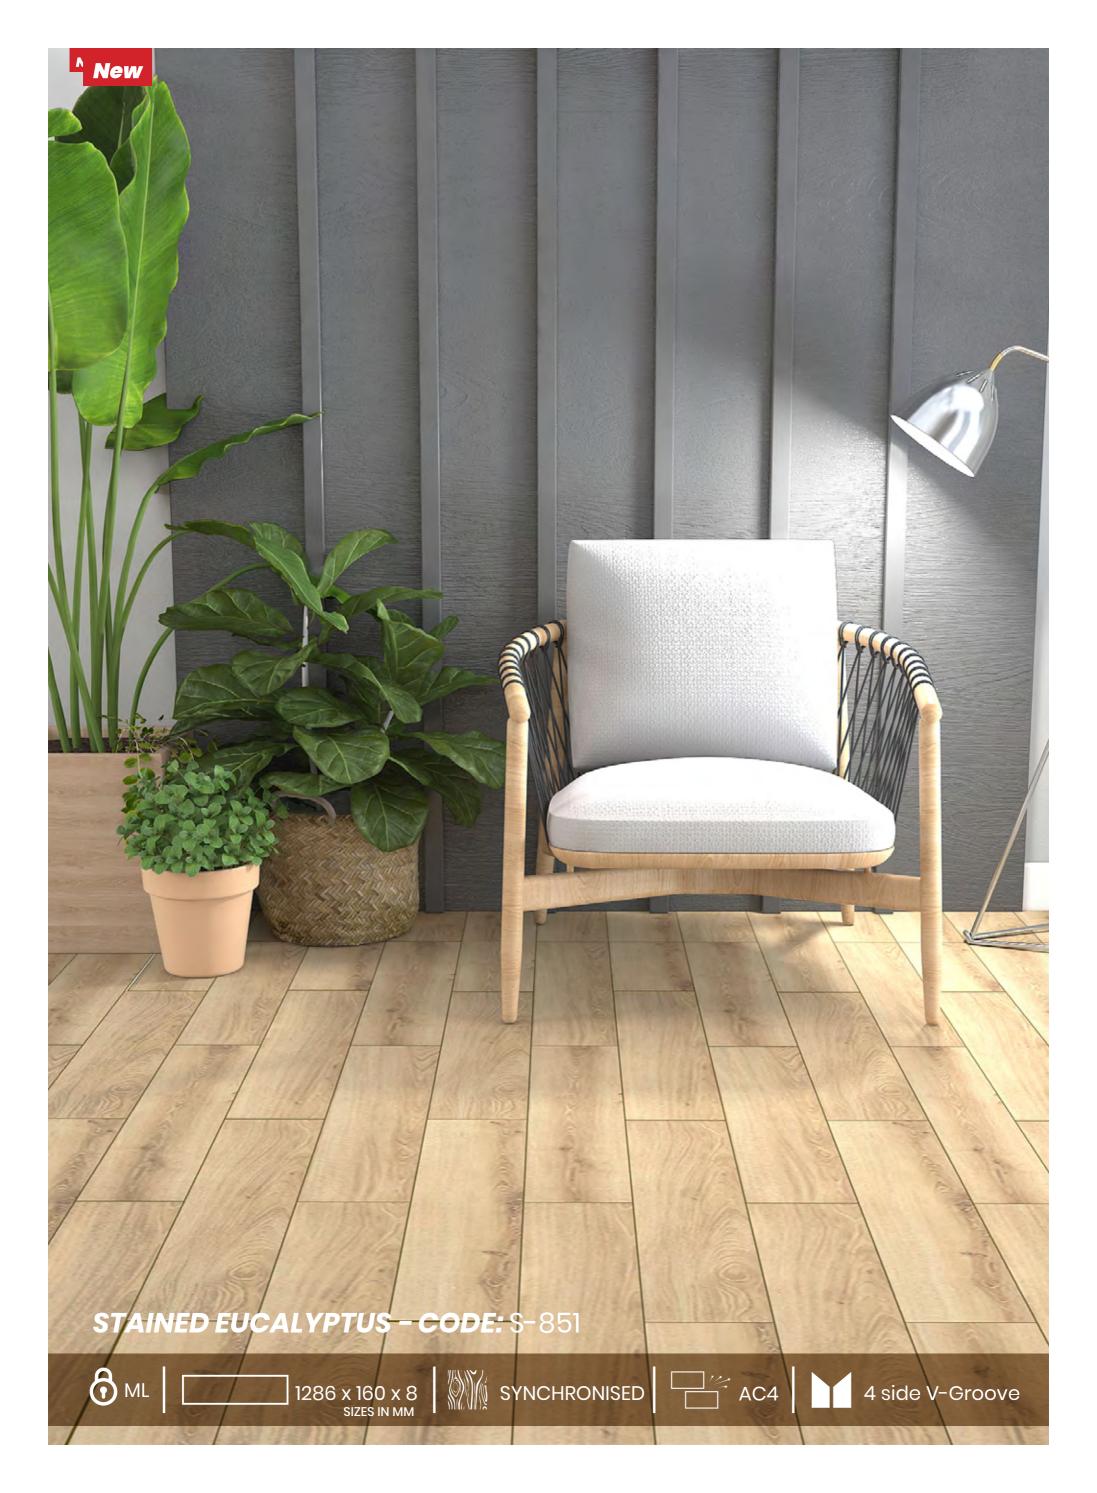







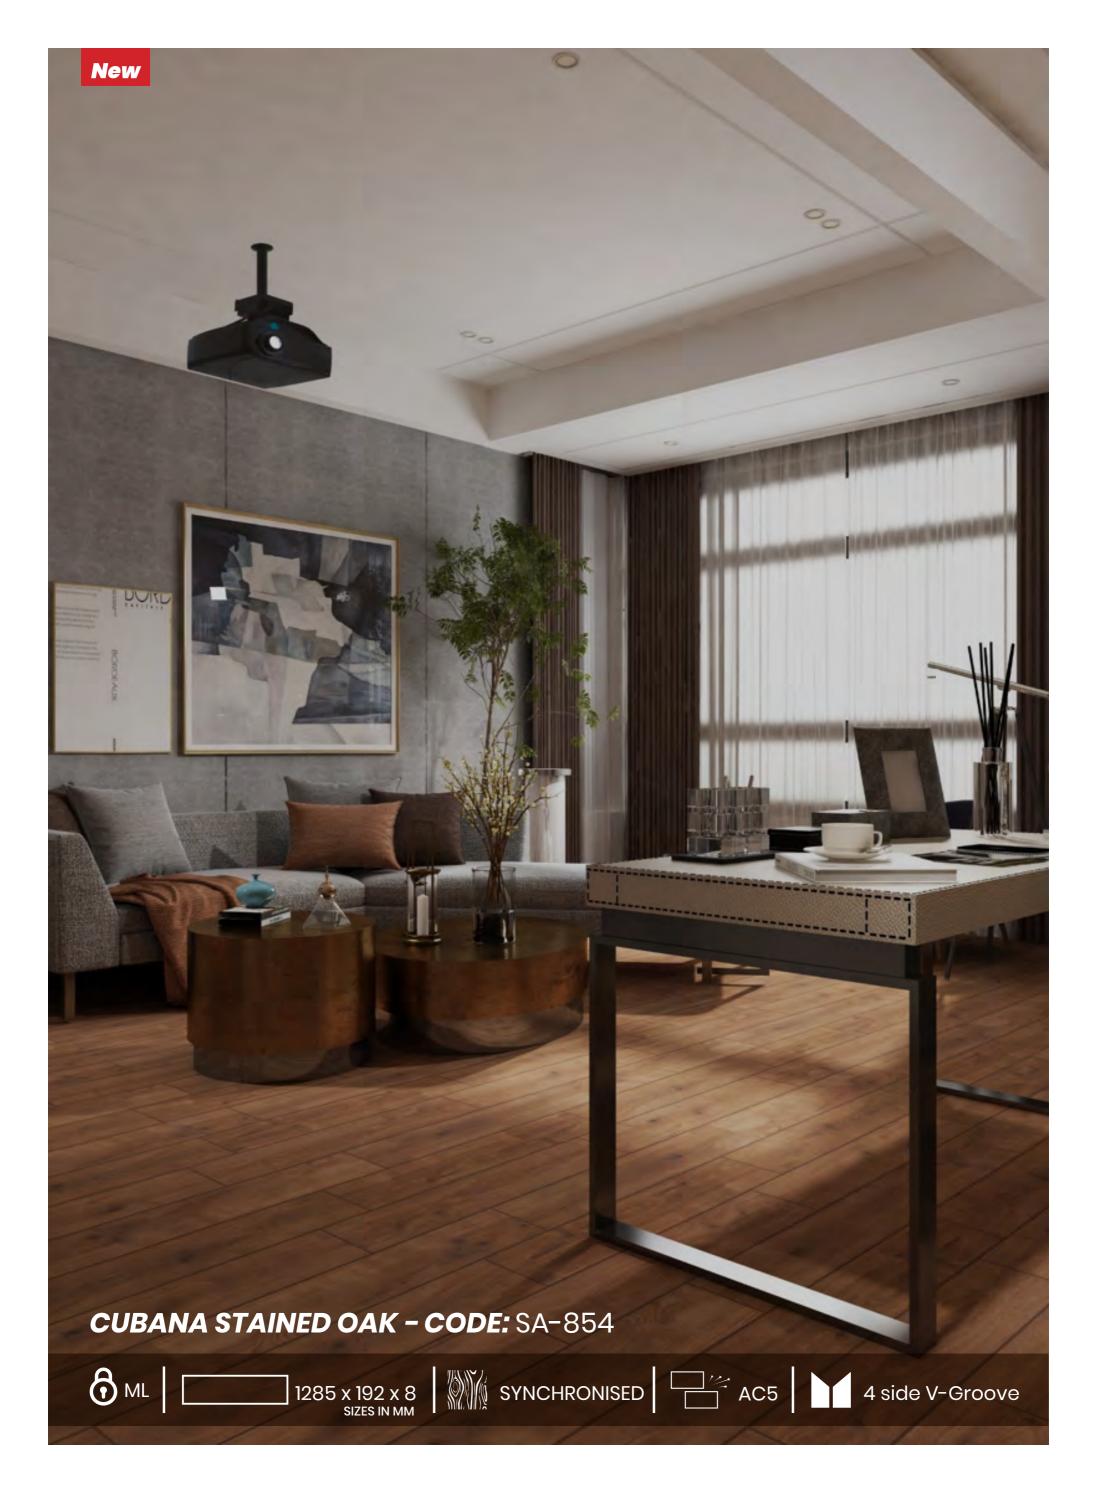

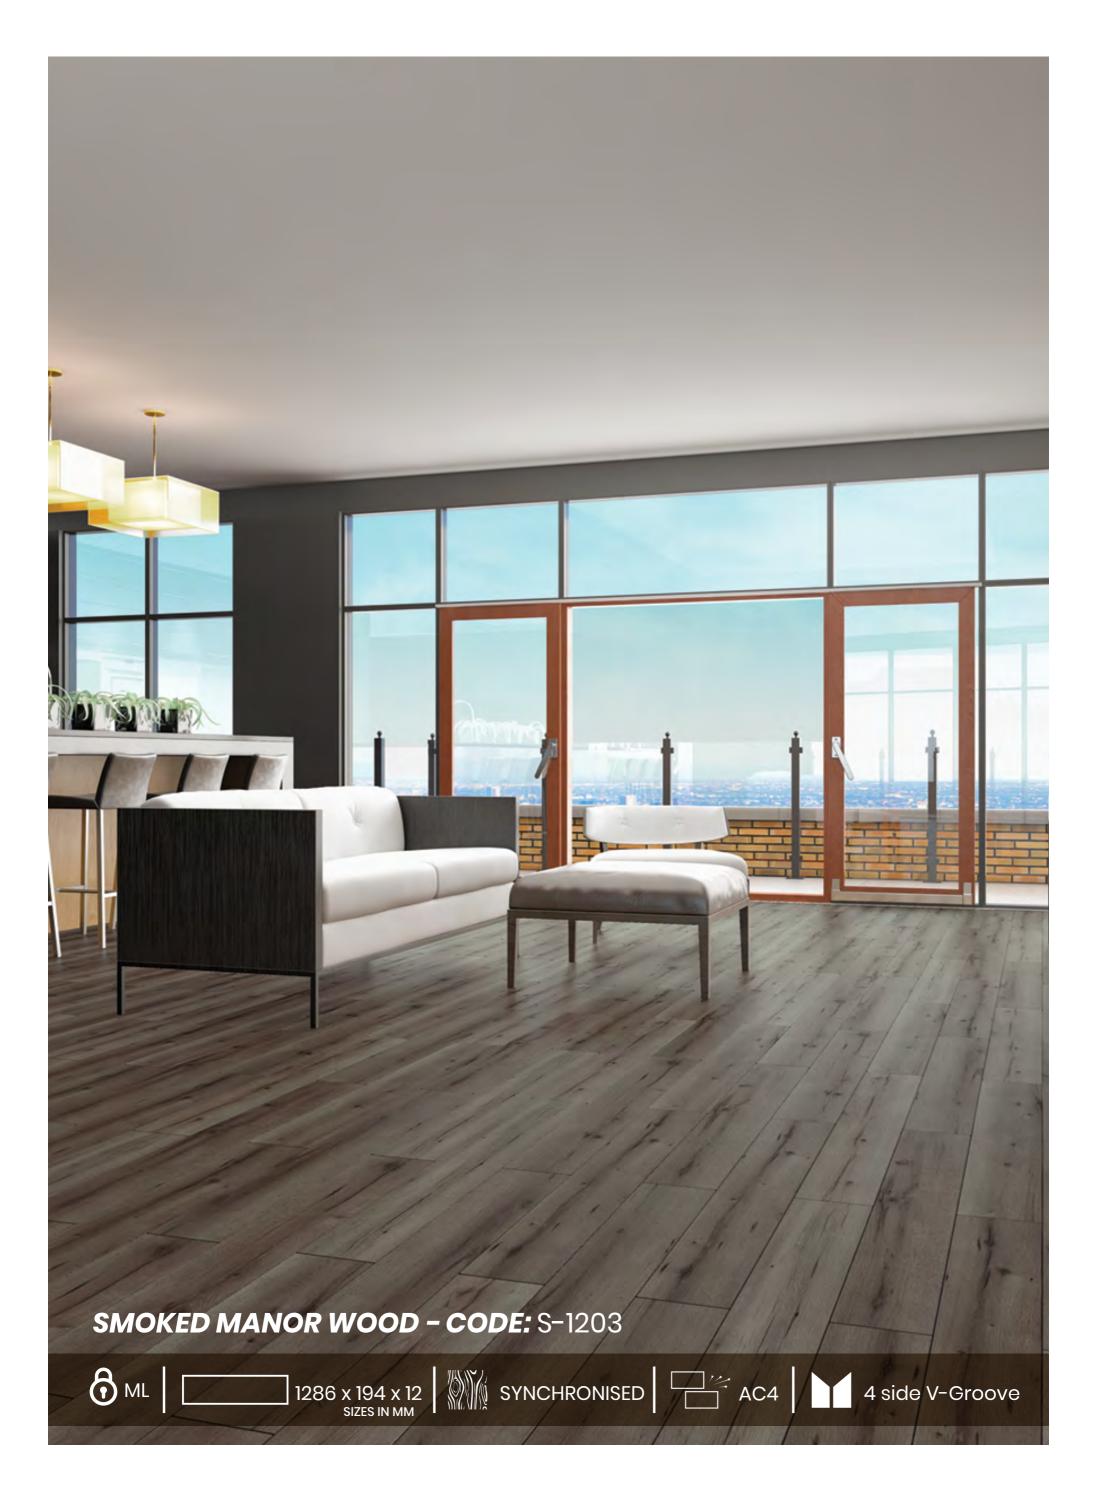

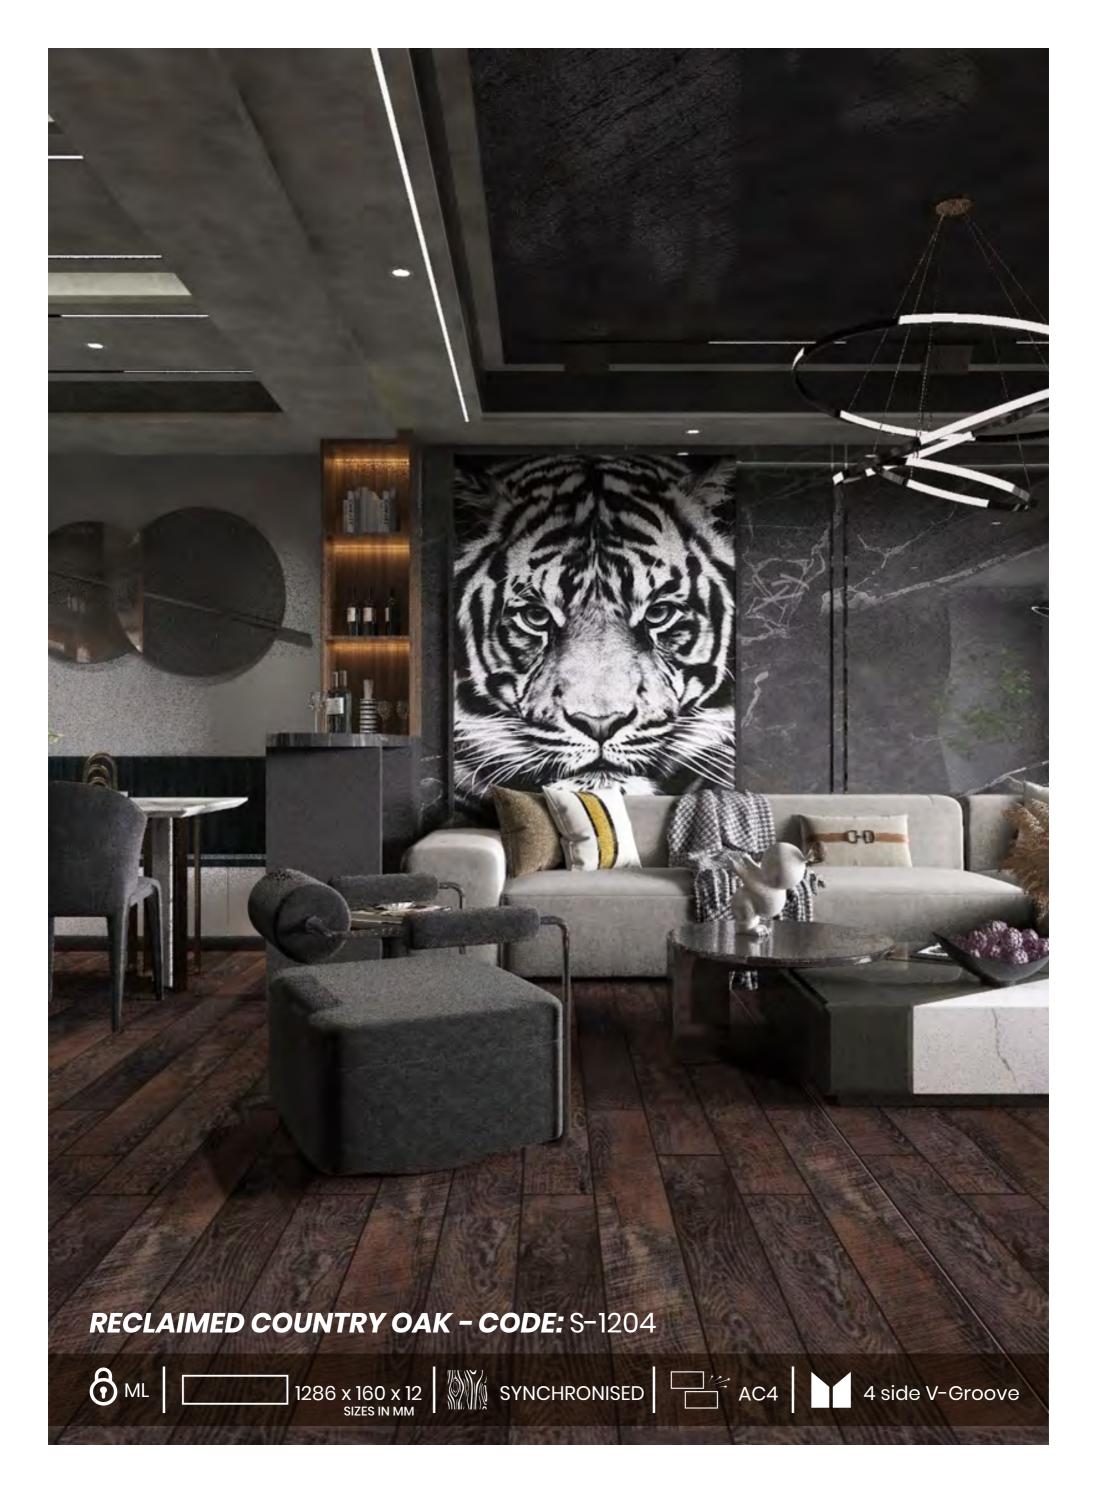

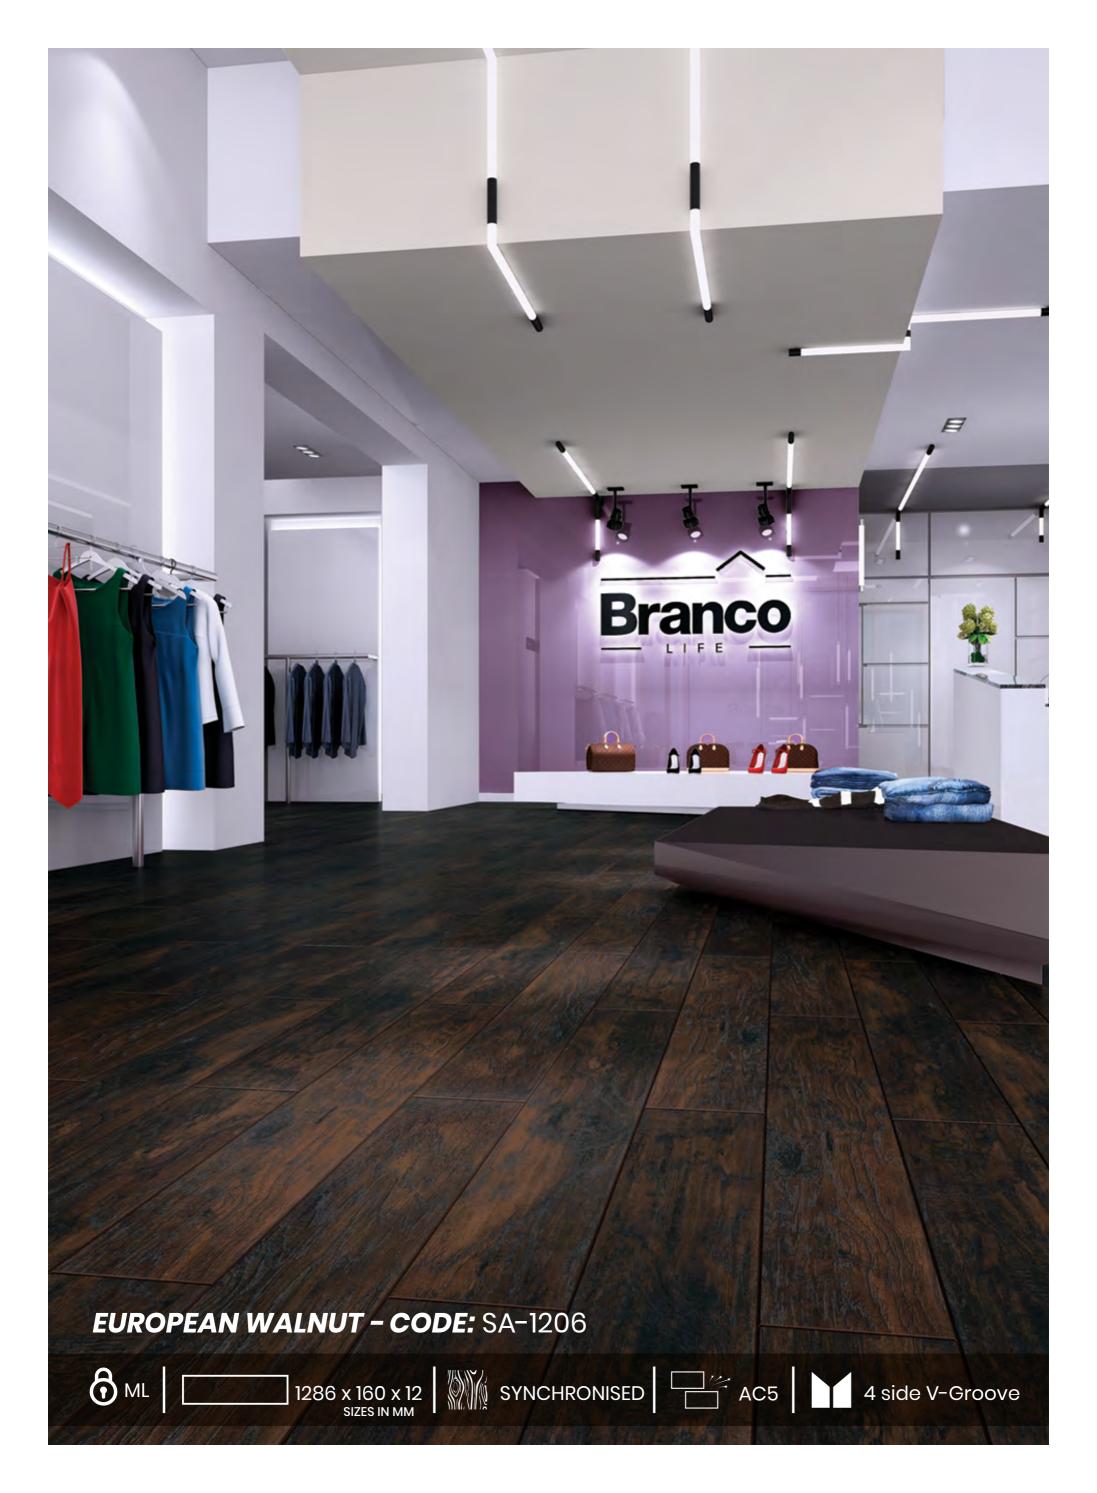



TECHNICAL PARAMETERS

| Characteristics | Test Method | Requirements | Characteristics | Test Method | Requirements |
|---------------------------|---------------------------------|--|-----------------------------|-------------|--|
| General Requirements | | | Classification Requirements | | |
| Squareness | EN 13329 | ≤ 0.20 mm | Castor chair resistance | EN 425 | no damage with type W after 25000 cycles |
| Straightness | EN 13329 | ≤ 0.30 mm | Lastina streath | 100 01001 | FI0.2 ≤ 1.0 kN/m |
| | | Width: concave ≤ 0.15% convex ≤ 0.20 % Length: concave ≤ 0.50 % convex ≤ 1.00 % | Locking strength | 190 24334 | Fs0.2 ≤ 2.0 kN/m |
| Flatness of the elements | EN 13329 | | Movement of a furniture leg | EN 424 | no damage with type 0 |
| Openings | EN 13329 | Ø ≤ 0.15 mm / max. ≤ 0.20 mm | Resistance to staining | EN 438 | 5 (group 1 and 2), 4 (group 3) |
| | | | Surface soundness | EN 311 | ≥ 1.25 N/mm ² |
| Height difference | EN 13329 | ≤ 0.10 mm / max. ≤ 0.15 mm | Wear resitance (AC4) | EN13329 | IP≥ 4000 cycles |
| Residual indentation | EN ISO 24343-1 | ≤ 0.05 mm | | | |
| Light fastness | EN 20105-A02 | grey scale level ≥ 4 | Wear resitance (AC5) | EN13329 | IP≥ 6000 cycles |
| | | | Impact resistance (AC4) | EN13329 | small-diameter ball≥ 12N, large- diameter ball≥ 750 mm |
| Essential Characteristics | | | | | and or or other parts 100 mm |
| Reaction to fire* | EN ISO 11925-2 EN ISO 9239-1 | Cfl - S1 | Impact resistance (AC5) | EN13329 | small-diameter ball≥ 15N, large- diameter ball≥ 1000 mm |
| Slip resistance* | EN 13893 | DS | Thickness swelling (AC4) | EN13329 | ≥18% |
| Formaldehyde" | EN 717-1 | EI | Thickness swelling (AC5) | EN13329 | ≥15% |

Page Refrence


| CODE | PAGE NO | CODE | PAGE NO |
|--------|----------------|---------|---------|
| 802 | 10 | SA 843 | n |
| 804 | 10 | SA 844 | 17 |
| 805 | 12 | L 846 | 15 |
| 831 | 14 | L847 | 16 |
| 832A | 14 | SAL 848 | 16 |
| 833 | 15 | S 849 | 17 |
| S 837 | 15 | S 851 | 18 |
| SA 839 | 13 | SL 852 | 18 |
| SA 840 | 13 | SA 853 | 19 |
| SA 841 | 14 | SA 854 | 19 |
| | | | |

| CODE | PAGE NO |
|---------|---------|
| SH 855 | 04 |
| SH 856 | 07 |
| SH 857 | 09 |
| SA 1004 | 10 |
| S 1201 | 01 |
| S 1202 | 17 |
| S 1203 | 20 |
| S 1204 | 21 |
| SA 1206 | 21 |



INSTALLATION & MAINTENANCE

INSTALLATION

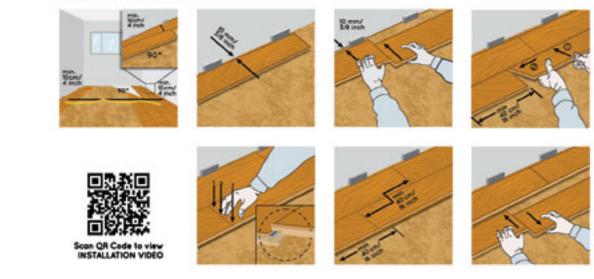

PRE-INSTALLATION PREPARATION



CLEANING & MAINTENANCE
















Scan QR Code to view



